

1 **NOTE:** Install Power Zone® Pre-Set™ Self-facing System left to right. Place pre-assembled unit on left edge of shelf and line up holes at front of Power Zone® Pre-Set™ unit with holes of shelf.

TIP: If front and rear rails are not even on the left-most part of the shelf, gently tap left end of Power Zone® Pre-Set™ unit on the floor to even them.

TIP: Begin placing the pusher fixture at the bottom-most shelf on the left side of the plan-o-gram area. If installing on multiple shelves on the same fixture, work bottom to top and work left to right.

TIP: During installation, once pusher fixture is placed on shelf, test tallest product for easy removal relative to above shelf. If product is too close to shelf above, reposition shelf as needed.

2 Secure Power Zone® Pre-Set™ to shelf by inserting fasteners through holes in front rail and shelf. (3 per unit included). To unfasten from shelf, simply lift up assembled unit and fasteners will disengage from shelf.

3 The Left End Divider has two adhesive pads. Remove liner and adhere to left edge of Power Zone® Pre-Set™ front and back rails.

4 Starting with first row on the left end of Power Zone® Pre-Set™ System, slide pusher track/divider to match width of product. Load first row of product. Repeat this step until you reach right edge of Power Zone® Pre-Set™.

5 **NOTE:** Use Drop-In Trak where needed for wider product. Insert front edge of Drop-In Trak under lip of front rail. Rotate downward to lock in place. Slide track/divider toward Drop-In Trak until it fits the product.


6 **NOTE:** Left End Divider not needed when connecting two units together. Place next Power Zone® Pre-Set™ System on top of store shelf. Line up Power Zone® Pre-Set™ front and rear rails with previously installed Power Zone® Pre-Set™ System. Align holes in front rail with shelf holes. Secure with fasteners.

7 **OPTIONAL:** Rotate paddle extender for tall or wide product. Slide paddle extender onto pusher paddle of Drop-In Trak.


8 The last pusher track/divider will be used as the right end divider.

Drop-In Trak


Use for wider product.

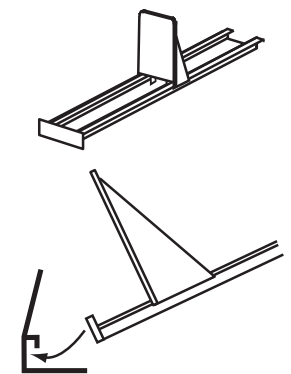

1 Insert front edge of Drop-In Trak under lip of front rail.



2 Rotate downward to lock in place.



3 Slide track/divider toward Drop-In Trak until it fits the product.

